


Non-pressurized vessels designed for the storage and transportation of liquid nitrogen



- Capacity of 7 to 100 litres
- Static holding time up to 180 days
- 6 year guarantee on the vacuum



Insulated lid

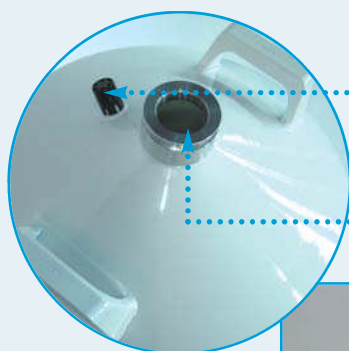

Vacuum valve

Neck diameter 50 mm

Main characteristics include

Various dispensing systems can be fitted to the TR

- Tipping handle **C**
- Tipping stand **E**
- The DL3 pressurized decanting system **D**

Quality

- Made out of aluminum and composite materials provides for low consumption and light weight
- High quality polyurethane paint for long life
- Standard neck diameter of Ø 50 mm
- Vacuum valve

Tipping handle **C**





Filling a TR using
a TP

Application areas include:
Industrial, laboratories, life sciences,
medical, ...

Gamme TR

		TR11	TR21	TR26	TR35	TR60	TR100
CHARACTERISTICS							
Liquid capacity	l	12.2	21.5	26	33.6	60	99
Diameter of neck	mm	50	50	50	50	50	50
Static holding time	d ¹⁾	67	119	130	140	150	180
Daily evaporation rate	l/d ¹⁾	0.18	0.18	0.2	0.24	0.4	0.55
Weight empty	kg	7.5	11.0	13.5	15.8	21.5	29.5
Weight full	kg	17.3	28.3	34.6	43	70	110
External diameter	mm	308	388	388	468	468	510
Total height	mm	584	605	669	655	869	986
Total interior height	mm	530	535	612	580	800	933
PRODUCT REFERENCES							
References to order		TR11-1	TR21-1	TR26-1	TR35-1	TR60-1	TR100-1
MAIN ACCESSORY REFERENCES							
A: Roller base		ACC-ALU-29					
B: Fixation kit for the roller base (3 parts)		ACC-ALU-32					
C: Tipping handle		ACC-TR-15	ACC-TR-16	ACC-TR-16	–	–	–
D: DL3 pressurized decanting system		ACC-TR-5					
E: Tipping stand		–	ACC-TR-17	ACC-TR-17	ACC-TR-18	–	–
F: Flexible transfer hose (DN10) ²⁾	1.1 m	ACC-FL180180NL-11					
Flexible avec canne de transfert (DN10) ³⁾⁴⁾⁵⁾		F + G1 ou F + G2					
G1: Transfer cane with anti-splash nozzle		ACC-FLTC-2					
G2: Transfer cane without anti-splash nozzle		ACC-FLTC-1					

1) Daily evaporation and static holding time are given for the following conditions: 20°C, 1 013 mb, and vessel is stationary with lid closed.

These are nominal values and may vary according to the history of the vessel and the manufacturing tolerances.

2) The flexible hoses are available in different lengths: 1.5, 2, 3 and 4 meters. If the length = 1.5 m the commercial reference = NL-15.

If the length = 2 m the commercial reference = NL-20. If the length = 3 m the commercial reference = NL-30. If the length = 4 m the commercial reference = NL-40.

